

## SERIES A1400M STANDARD DUTY BLOCKS

### DESCRIPTION

Designed on a pattern similar to our heavy-duty models shown above but with a lesser load capacity.

A very useful tool for oceanography and similar measuring work. Fabricated from high-strength aluminum alloys and fitted with high-grade bearings.

Urethane sheave liners are offered in regular sizes or specials which entails filling the sheave groove and machine sizing.


Socket eye suspension fitting is standard and will accept any of the attachments shown below.



## A1400M SERIES STANDARD DUTY OCEANOGRAPHY BLOCKS

MODEL NUMBER	SHEAVE DIAMETER	CONDUCTOR CAPACITY		WORKING LOAD POUNDS	ULTIMATE STRENGTH POUNDS	WEIGHT POUNDS
		WITHOUT LINERS	WITH LINERS			
A1418D	18"	1-3/4"	1-1/2"	4,500	13,500	36
A1422D	22"	1-3/4"	1-1/2"	7,000	21,000	44
A1424A	24-1/2"	1-3/4"	1-1/2"	10,000	24,000	62
A1428D	28"	1-7/8"	1-5/8"	8,000	24,000	66

Weights shown above are for blocks without liners.

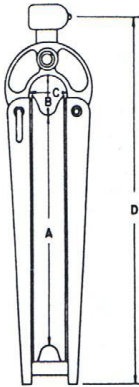

SPECIFICATIONS				
BLOCK NO.	A	B	C	D
A1418D	14"	4"	5"	26"
A1422D	18"	4"	6"	30"
A1424A	21"	3"	3-1/2"	32"
A1428D				
A1436D	30"	4-1/2"	5-1/2"	45"
A1436I	30"	4-1/2"	5-1/2"	45"

### SUSPENSION FITTING ATTACHMENTS

MODEL NUMBER	DESCRIPTION	LOAD CAPACITY	LOAD CAPACITY
12	Safety Ball Hook	4,000	2,000
14	Plain Ball Clevis	4,000	
14A	Plain Ball Clevis with Captive Pin		
15	Y-Ball Clevis	20,000	
16	Oval Eye Ball	15,000	
20	Socket Eye	20,000	11,000