

## DESCRIPTION

Forged steel swivel hook is standard fitting and makes this block adaptable to many applications as well as stringing static wire.

Block is side opening for threading, is easily operated and positively locked by non-loseable pin when closed.

Ample throat clearance is provided for passing static fittings and conductor guards prevent pulling line wedging between sheave and frame.


Yoke, frame and sheave castings are made from high-strength aluminum alloys. These parts are made in permanent metal molds, and the molten metal is forced into the mold under pressure to assure strong, uniform, non-porous castings.

High quality self-lubricating bronze, twin ball, or tapered roller bearings are optional for all models.

Conductive Neoprene, or Urethane liners are available on all models.

Some sizes of the above blocks are available with steel sheave liners that are cast integrally in the aluminum sheaves to make them suitable for use with steel cable. Prices upon application.

Attachments are available for making block adaptable for mounting on crossarm, or insulator arm (1" or 1-1/4" Pins).

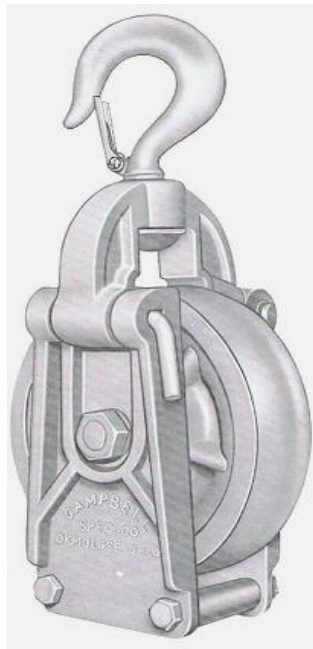

STANDARD THROAT MODEL



## A2100 SERIES STATIC WIRE STRINGING BLOCKS

MODEL NUMBER	SHEAVE DIAMETER	CONDUCTOR CAPACITY		WORKING LOAD POUNDS	WEIGHT POUNDS
		WITHOUT LINERS	WITH LINERS		
A2141	4"	1"	3/4"	3,000	5
A2151	5"	1"	3/4"	3,000	5-1/2
A2161	6"	1"	3/4"	3,000	6-1/2
A2171	7"	1"	3/4"	3,000	8-1/2
A2181	8"	1"	3/4"	3,500	9-1/2
A21101	10"	1"	3/4"	4,000	13
A21121	12"	1-1/8"	7/8"	4,000	16

Load ratings are based on average lead angle when conductors are strung under normal stringing conditions and are conservative.

MODEL NUMBER	SPECIFICATIONS			
	A	B	C	D
A2141	2-3/4"	1"	1-3/4"	8-5/8"
A2151	3"	1-1/2"	1-3/4"	9-5/8"
A2161	4"	1-1/2"	1-3/4"	11"
A2171	5"	2-1/2"	1-3/4"	12"
A2181	6"	2-1/2"	1-5/8"	13"
A21101	7-1/2"	2-1/2"	1-5/8"	16"
A21121	10"	2-1/2"	1-5/8"	18"

