

DESCRIPTION

A sturdy, dependable conductor stringing block of proven design. The front side has a hinged link that opens for easy threading, and is securely locked with a captive self-locking handle pin.

Extra large throat has smoothly contoured edges that permit swivels, splices, etc., to pass freely without danger of jamming.


Made entirely from high-strength aluminum alloy permanent mold castings that are designed with large fins, yet have voids where possible for reducing weight.

Streamlined, all edges are contoured and corners are rounded. There are no projections to injure workers, or obstruct passage when raising or lowering block.

A choice of self-lubricating bronze, ball, or tapered roller bearings is offered. The tapered roller bearing absorbs side side loads (THRUST) and assures free-turning sheaves when either stringing or sagging.

A choice of conductive-type Neoprene liner, or Urethane liner is offered, and is extra.

Suspension fitting attachments are listed below.

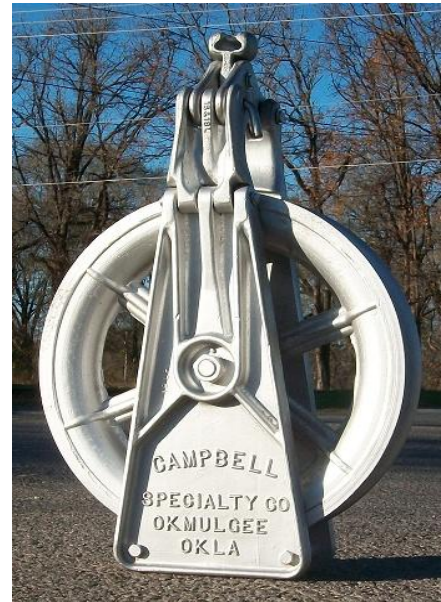


A2500 Series

CONDUCTOR STRINGING BLOCKS



MODEL NUMBER	SHEAVE DIAMETER	CONDUCTOR CAPACITY		WORKING LOAD POUNDS	WEIGHT POUNDS
		WITHOUT LINERS	WITH LINERS		
A2507A	7"	1"	3/4"	3,000	10
A2507B	7"	2"	1-3/4"	3,000	13
A2507E	7"	4"	3-3/4"	3,000	16
A2508A	8"	1"	3/4"	3,500	13
A2508B	8"	2"	1-3/4"	3,500	14
A2508C	8"	3"	3"	3,500	15
A2510B	10"	1-1/4"	1"	3,500	16
A2510C	10"	1-5/8"	1-3/8"	3,500	17
A2510D	10"	3"	3"	3,500	20
A2510E	10"	4"	3-3/4"	3,500	32
A2512A	12"	1-1/8"	7/8"	4,000	18
A2512C	12"	2"	1-3/4"	4,000	22
A2515B	15"	1-5/8"	1-3/8"	4,000	24
A2515C	15"	3"	3"	4,000	32
A2518B	18"	1-5/8"	1-3/8"	4,000	34
A2518D	18"	2"	1-3/4"	4,000	36
A2518C	18"	3"	3"	4,000	36
A2522C	22"	2"	1-3/4"	4,500	44
A2522D	22"	3"	3"	4,500	50

Load ratings are based on average lead angle when conductors are strung under normal stringing conditions and are conservative.

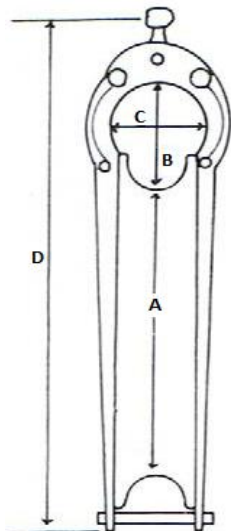

BLOCK NO.	SPECIFICATIONS	
	A	B
A2507A	5"	4-1/2"
A2507B	4-1/2"	4-1/2"
A2507E	3-1/2"	5"
A2508A	6"	2-1/2"
A2508B	5-1/4"	3-3/4"
A2508C	4"	4-1/4"
A2510B	7-1/4"	3-3/4"
A2510C	7"	3-1/2"
A2510D	6"	4-1/2"
A2510E	6"	4-1/2"
A2512A		
A2512C		
A2515B	11-7/8"	4-1/2"
A2515C	11"	6-1/2"
A2518B	15"	5"
A2518D	14"	5"
A2518C	14-1/4"	6-1/2"
A2522C	18"	4-1/2"
A2522D	18-1/4"	5-1/4"

SUSPENSION FITTING ATTACHMENTS



MODEL NUMBER	DESCRIPTION	LOAD CAPACITY	LOAD CAPACITY
12	Safety Ball Hook	4,000	2,000
14	Plain Ball Clevis	4,000	
14A	Plain Ball Clevis with Captive Pin		
15	Y-Ball Clevis	20,000	
16	Oval Eye Ball	15,000	
20	Socket Eye	20,000	11,000



