

**DESCRIPTION**

Designed with a rigid back frame that supports the block when it is opened for threading. The axle is threaded into the front frame section which produces a very rigid block.

The front link hinges down for conductor clearance and closes easily over the locking pin. The locking pin is captive and is constantly under spring tension which prevents accidental opening.

The throat is large, being both wide and high, and will accommodate swivels and splices without the danger of them jamming. The edges are rounded to prevent chaffing of the conductor. The frames have hand holds for carrying and handline hook.

The block frames and sheave are made from high-strength aluminum alloys and are designed with ribs and struts that add strength without excessive weight.

All steel parts are plated to prevent rusting.

A choice of self-lubricating bronze, ball, or tapered roller bearings is offered. The tapered bearing absorbs side loads (THRUST), and assures free-turning sheaves when either stringing or sagging.

A choice of conductive-type Neoprene liner, or Urethane liner is offered and is extra.




**A2800 Series**

**CONDUCTOR STRINGING BLOCKS**

MODEL NUMBER	SHEAVE DIAMETER	CONDUCTOR CAPACITY		WORKING LOAD POUNDS	WEIGHT POUNDS	BLOCK SELF-LUBE BEARINGS	BLOCK BALL BEARINGS	BLOCK ROLLER BEARINGS	EXTRA FOR NEOPRENE LINERS	EXTRA FOR URETHANE LINERS
		WITHOUT LINERS	WITH LINERS							
A2881	8"	1"	3/4"	3,500	9-1/2	\$	\$	\$	\$	\$
A2816A	16-1/2"	1-3/8"	1-1/8"	4,000	28	\$	\$	\$	\$	\$
A2818B	18"	1-5/8"	1-3/8"	4,000	34	\$	\$	\$	\$	\$
A2820B	20"	2"	1-3/4"	4,000	40	\$	\$	\$	\$	\$
A2828B	28"	1-7/8"	1-5/8"	6,000	74	\$	\$	\$	\$	\$
A2828D	28"	2-1/8"	1-7/8"	6,000	75	\$	\$	\$	\$	\$

Load ratings are based on average lead angle when conductors are strung under normal stringing conditions and are conservative.

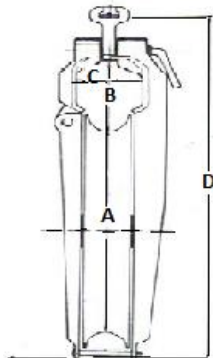

BLOCK NO.	SPECIFICATIONS			
	A	B	C	D
A2881	6"	3-1/4"	2-3/4"	14"
A2816A	14"	5"	3-1/2"	25"
A2818B	15"	5-1/2"	3-3/4"	26"
A2820B	16-1/2"	6"	4-1/2"	28"
A2828B	24"	6"	4-1/2"	38"
A2828D	24"	6"	4-3/4"	38"

**SUSPENSION FITTING ATTACHMENTS**



MODEL NUMBER	DESCRIPTION	LOAD CAPACITY	PRICE EACH	LOAD CAPACITY	PRICE EACH
12	Safety Ball Hook	4,000	\$	2,000	\$
14	Plain Ball Clevis	4,000	\$		\$
14A	Plain Ball Clevis with Captive Pin		\$		\$
15	Y-Ball Clevis	20,000	\$		\$
16	Oval Eye Ball	15,000	\$		\$
20	Socket Eye	20,000	\$	11,000	\$